

## IRthermo-Anemometers


### ST730/ST732/ST733

#### Features:

1. Simultaneous display of air flow in CFM/CMM or air velocity plus ambient temperatures.
2. Combination of hot wire and standard thermistor, deliver rapid and precise measurements event at low air velocity.
3. Infrared thermometer measures remote surface temperatures to 999°F(537°C) with 8:1/30:1 distance to spot ratio and laser pointer.
4. Wide range measurement of air velocity, fast response time.
5. Multi-functions for air flow measurement: m/s, km/h, ft/min, knots, mile/h.
6. Super large LCD with dual function display, read the air velocity and temperatures at the same time.

#### Applications:

- |                                |                     |
|--------------------------------|---------------------|
| 1. Environmental testing       | 6. Flow hoods       |
| 2. Ventilation system          | 7. Air conveyors    |
| 3. Refrigerated case           | 8. Furnace velocity |
| 4. Fans/motors/blowers         |                     |
| 5. Far distance temp. monitor. |                     |

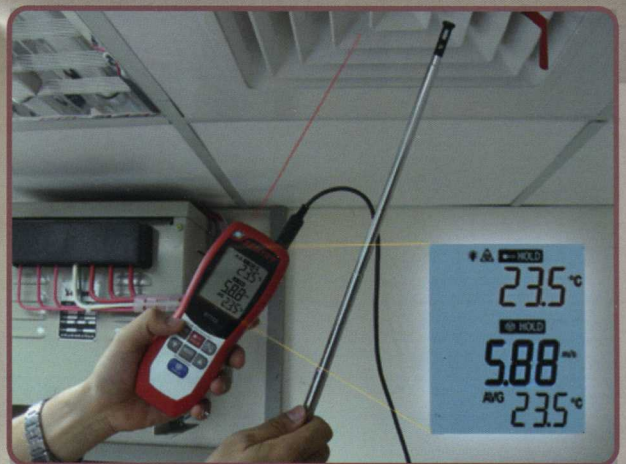

● Air conditioner

● Factory Ventilation Systems

