



Fotowoltaika / Bezpieczniki 10x38mm 1000V DCgPV i podstawy rozłączalne

Wkładki topikowe cylindryczne 10x38 1000V DC gPV typ Z10 (2~20A) i HP10M (25A)

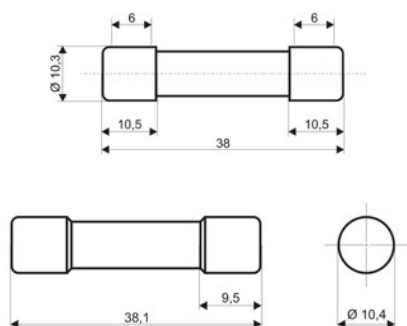

| Typ | Un [V] | In [A] | Całk. Joule`a przeładunkowa $I^2_t [A^2s]$ | Całk. Joule`a wyłączenia $I^2_t [A^2s]$ | Stray mocy Pn [W] | Nr kat. |
|---------------|--------|--------|---|--|----------------------|---------|
| Z10DC2/1000V | 1000 | 2 | 1,3 | 3,5 | 1,25 | 530011 |
| Z10DC4/1000V | 1000 | 4 | 4 | 13 | 1,25 | 530012 |
| Z10DC6/1000V | 1000 | 6 | 10 | 45 | 1,65 | 530013 |
| Z10DC7/1000V | 1000 | 7 | 13 | 57 | 1,92 | 530014 |
| Z10DC8/1000V | 1000 | 8 | 17 | 62 | 2 | 530015 |
| Z10DC10/1000V | 1000 | 10 | 21 | 88 | 2,3 | 530016 |
| Z10DC12/1000V | 1000 | 12 | 28 | 110 | 2,2 | 530019 |
| Z10DC15/1000V | 1000 | 15 | 33 | 260 | 2,4 | 530020 |
| Z10DC16/1000V | 1000 | 16 | 35 | 270 | 2,6 | 530021 |
| Z10DC20/1000V | 1000 | 20 | 50 | 430 | 3 | 530022 |
| HP10M25 | 1000 | 25 | b.d. | b.d. | 1,2~2,9 | 530023 |

Podstawy rozłączalne Z10-TL.../E i Z10-TL do wkładek cylindrycznych 10x38 gPV

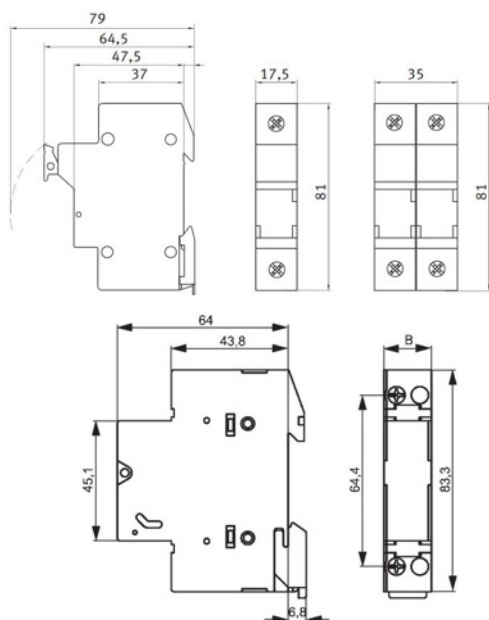

| Typ | Liczba biegunów | Un [V] | In [A] | Wskaźnik | Nr kat. |
|------------------|-----------------|--------|--------|----------|---------|
| Z10-TL1/DC000V | 1 | 1000 | 25 | - | 530001 |
| Z10-TL2/DC1000V | 2 | 1000 | 25 | - | 530002 |
| Z10-TL1/DC000V/E | 1 | 1000 | 25 | - | 530003 |
| Z10-TL2/DC000V/E | 2 | 1000 | 25 | - | 530004 |

